




PRODUCT SUBMITTAL

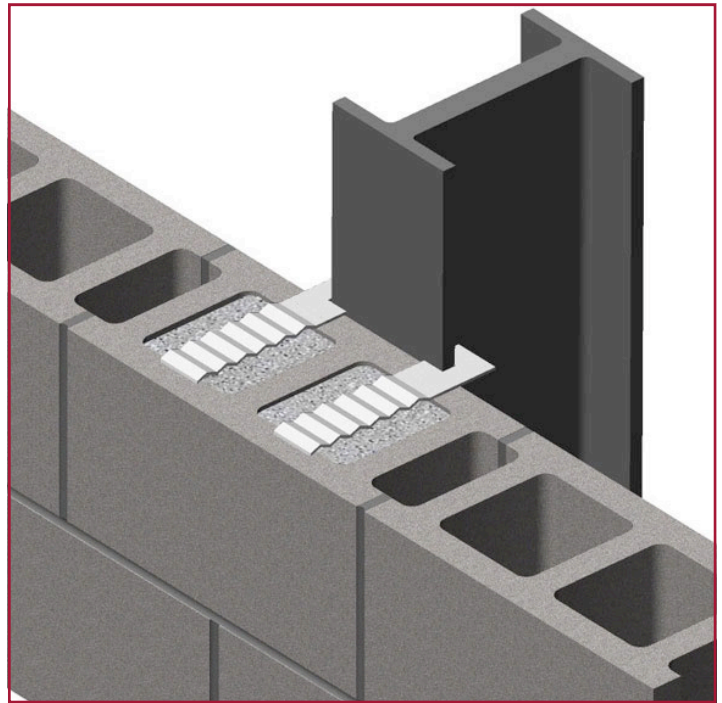

2800 Notched Column Anchor - Corrugated

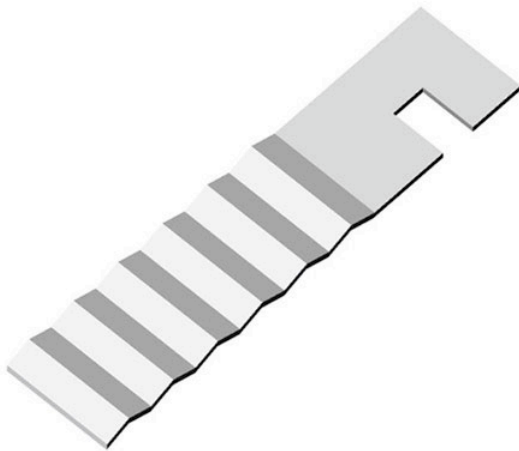

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>SHEET METAL - Stainless Steel AISI Type 304 ASTM A 666, ASTM 580 / ASTM 580M, ASTM A480/480M</p> <div style="display: flex; align-items: center; margin-top: 20px;">  <p>Recycled Content: Mill Galvanized & Hot Dip, 82.8 % Post-Consumer 17 % Post Industrial / Pre - Consumer</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> </div>	<p>STANDARD DIMENSIONS : 12 Gauge thick x 2" wide x 7" long</p> <p>FLANGE SLOT: 5/8" wide x 1" deep located 1" from end</p> <p>Custom sizes available upon request.</p> <p>FINISH: Mill Galvanized Hot Dip Galvanized Stainless Steel</p>



www.wirebond.com

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com