


## Stainless Steel Thru-Wall Flashing

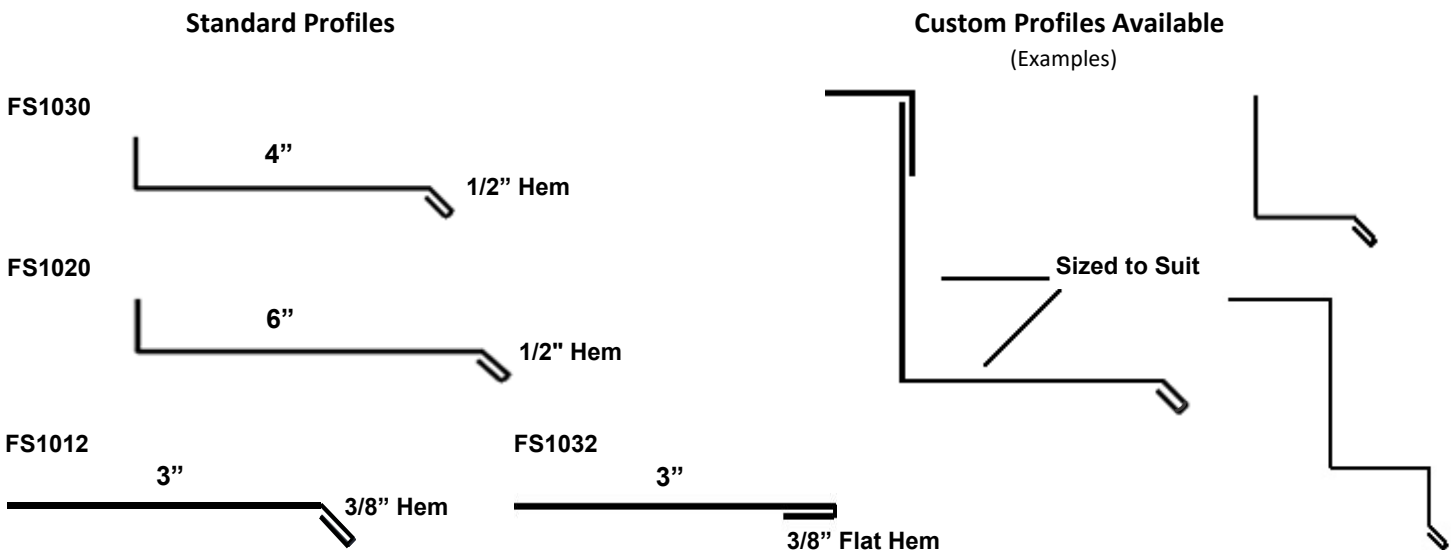

### Hemmed Drip Edges

(use in conjunction with membrane or laminated flashings)

*Other Profiles Readily Available!*

### Product Information:

#### Uses:

- Thru-Wall Flashing\*

#### Dimension:

- 28 gauge (.015) x standard 10'-0" lengths

#### Finish:

- Stainless Steel – Type 304 / 2D Finish  
ASTM A240/A240M, ASTM A666,  
ASTM A480/A480M and ASTM A167

#### Advantages:

- Durability, not prone to tears or punctures
- Very long life
- Hemmed drip edges deflect downward migrating water away from the building
- Hemmed drip edges form safe, clean aesthetically attractive lines
- Separate hemmed drip edge piece can supplement the performance of membrane and laminated copper flashing

**Note: Seam minimum 4" laps with two beads of Lap Rite™ non-skinning butyl metal flashing sealant.**

\*Exposed metals not recommended for use at base of wall details.

For technical assistance call us toll free at 1-800-659-4731.

